




> Outdoor Hi-Res Dual Power Vandal Proof WDR Dome camera


Item	Specifications
Chipset	Effio-ETM
Resolution	700 TV Line
Sensor	1/3" SONY EXVIEW HAD CCD II
Total pixels	1020(H) x 508(V) 520K pixels
Effective pixels	976(H) x 494(V) 480K pixels
Scanning system	2:1 Interface
S/N (Y signal)	More than 52dB (AGC Off)
Frequency	Horizontal: 15.734 KHz / Vertical: 59.94 Hz
Video Output	CVBS: 1.0Vp-p / 75ohm
Min. illumination	0.1 Lux at 1.2
White Balance	ATW / PUSH / USER1 / USER@ / ANTI CR / MANUAL / PUSH-LOCK
Electronic shutter speed	AUTO / MANUAL (1/60 sec ~ 1/100,000 sec)
O.S.D.	Built-in
Backlight compensation	OFF, BLC, HLC, Selectable
ATR	ON / OFF (LEVEL ADJUSTABLE)
2DNR (2D Digital Noise Reduction)	ON / OFF (LEVEL ADJUSTABLE)
Privacy	ON / OFF (8 zones) (4 zones when Motion ON)
Motion Detection	ON / OFF (4 zones)
Image conversion	ON / OFF
Language	English, French, Spanish, Japanese, German, Russian, Portuguese
Operating Temperature / Humidity	-10°C ~ +50°C / 30% ~ 80% RH
Storage Temperature / Humidity	-20°C ~ +60°C / 20% ~ 90% RH
Power	AC24V / DC12V Dual Power

> Analog Camera AN2

- High Resolution, High sensitivity
- 700 TV Line Resolution
- 1/3" SONY Exview HAD CCD II
- WDR (Wide Dynamic Range)
- Upgraded Waterproof Housing (IP68)
- Digital Zoom (x1~x10)
- 3DDNR (3D Digital Noise Reduction)
- DIS (Digital Image Stabilizer)
- Day/Night Function (0.1 Lux at 1.2)
- DC Auto Iris Control
- Controlled by OSD Menu
- Privacy Function
- Motion Detection
- Easy Installation & 3-Axis

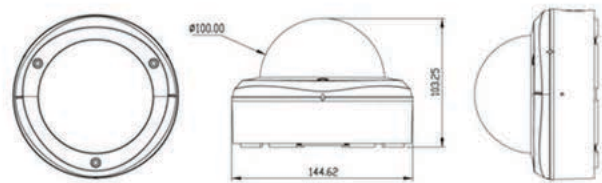

* Wall Mount Bracket (Optional)

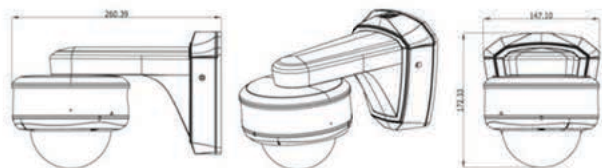

AN2

