

New Rapid Dome Cameras for Outdoor Surveillance from Sony

Sony is pleased to introduce its new rapid dome cameras for outdoor surveillance, the SNC-RS84 and SNC-RS86, which support H.264, MPEG-4, and JPEG compression formats. With a powerful streaming capability of 30 frames per second (fps) in D1 resolution, combined with newly developed image-enhancement technologies, these cameras dramatically enhance usability in a wide variety of lighting environments and across a broad range of applications.

What's more, specifically designed for outdoor monitoring, the SNC-RS84 and SNC-RS86 comply with the IP66 and IK10 standard, and include unique features ideal for outdoor use such as an impact-resistant polycarbonate lower dome cover and an integrated sunshade and ventilation mechanism. With a host of new features and excellent performance, the SNC-RS84 and SNC-RS86 are the perfect choice for your outdoor surveillance needs.



SNC-RS84N/SNC-RS84P
SNC-RS86N/SNC-RS86P

Network Rapid Dome Cameras SNC-RS84N/RS84P SNC-RS86N/RS86P

FEATURES

- **Visibility Enhancer for sharper, clearer images and a higher level of visibility**



OFF



ON

(Actual images)

- **XDNR (eXcellent Dynamic Noise Reduction) for clear images without blur under low illumination**



OFF



ON

(Actual images)

- **Wide-D technology to handle various lighting conditions in a scene**



Normal Shutter Speed



High Shutter Speed



With Wide-D Technology

(Simulated images)

- **Powerful and versatile zoom capability**
 - 36x optical and total zoom ratio of 432x with 12x digital zoom (SNC-RS86)
 - 18x optical and total zoom ratio of 216x with 12x digital zoom (SNC-RS84)
- **Three codecs (H.264, MPEG-4, JPEG) and triple streaming capability**
- **DEPA Advanced - Intelligent Video and Audio Analytics - trigger an alarm based on user-defined rules**
 - Intelligent Motion Detection with virtual border line function
 - Tamper Alarm
 - Advanced Audio Detection*1
- **Superior audio functions**
 - Voice alert
 - Ambient sound filter
 - Dynamic range compressor*1
 - Echo cancellation
- **Above-the-horizon tilt - 15° tilt-up, total tilt range of 210°**
- **High-speed 360° endless panning**
- **Quick-release mechanism**
- **Local storage/wireless capability**
- **Supporting for IPv6**
- **ONVIF conformance**
- **Designed for outdoor monitoring**
 - IP66 rating
 - Impact-resistant - IK10 rating
 - Integrated sunshade and ventilation mechanism




*1 Available with version 1.1 or later.

SPECIFICATIONS


Camera	SNC-RS84N	SNC-RS84P	SNC-RS86N	SNC-RS86P
Image device	1/4-type CCD with "Exwave" HAD technology			
Minimum illumination	Day : 0.4 lx (XDNR ON VE ON Slow Shutter OFF 50 IRE IP) 0.8 lx (Slow Shutter OFF 50 IRE Analog Video Output) Night : 0.09 lx (XDNR ON VE ON Slow Shutter OFF 50 IRE IP) 0.17 lx (Slow Shutter OFF 50 IRE Analog Video Output)		Day : 0.8 lx (XDNR ON VE ON Slow Shutter OFF 50 IRE IP) 1.6 lx (Slow Shutter OFF 50 IRE Analog Video Output) Night : 0.09 lx (XDNR ON VE ON Slow Shutter OFF 50 IRE IP) 0.17 lx (Slow Shutter OFF 50 IRE Analog Video Output)	
Number of effective pixels (H x V)	380,000 (768 x 494)	440,000 (752 x 582)	380,000 (768 x 494)	440,000 (752 x 582)
Electronic shutter speed	1 to 1/10,000 s			
Auto gain control	Auto/Manual (-3 to +28 dB)			
Exposure control	Auto, Full auto, Shutter-priority, Iris-priority, Manual, EV compensation, Backlight compensation			
White balance mode	Auto, Indoor, Outdoor, One-push WB, ATW, Manual			
Lens type	Auto-focus zoom lens			
Zoom ratio	18x		36x	
Horizontal viewing angle	2.8 to 48.0 degrees		1.7 to 57.8 degrees	
Focal length	f=4.1 to 73.8 mm		f=3.4 to 122.4 mm	
F-number	F1.4 (wide), F3.0 (tele)		F1.6 (wide), F4.5 (tele)	
Minimum object distance	290 mm (11 1/2 inches) to 800 mm (31 1/2 inches) (tele)		320 mm (12 5/8 inches) to 1500 mm (59 1/8 inches) (tele)	
Pan angle	360 degrees endless rotation			
Pan speed	400 degrees/s (max.)			
Tilt angle	210 degrees (with e-flip)			
Tilt speed	400 degrees/s (max.)			
Preset position	256 position			
Tour	5 preset tours*, 4 shadow tours *16 presets per one preset tour			
Camera Features				
Day/Night *1	Yes			
Wide-D	Yes			
Image enhancement	Visibility Enhancer			
Noise reduction	XDNR			
Image				
Codec image size (H x V)	720 x 480, 640 x 480 (VGA), 384 x 288, 320 x 240 (QVGA)	720 x 576, 640 x 480 (VGA), 384 x 288, 320 x 240 (QVGA)	720 x 480, 640 x 480 (VGA), 384 x 288, 320 x 240 (QVGA)	720 x 576, 640 x 480 (VGA), 384 x 288, 320 x 240 (QVGA)
Video compression format	H.264, MPEG-4, JPEG			
Maximum frame rate	H.264/MPEG-4/JPEG: 30 fps (720 x 480)	H.264/MPEG-4/JPEG: 25 fps (720 x 576)	H.264/MPEG-4/JPEG: 30 fps (720 x 480)	H.264/MPEG-4/JPEG: 25 fps (720 x 576)
Audio				
Audio compression	G.711/G.726			
Scene Analytics				
Intelligent motion detection	Yes (with built-in Post Filter)			
Intelligent object detection	No			
Advanced audio detection	Yes*2			
Network				
Protocols	IPv4, IPv6, TCP, UDP, ARP, ICMP, IGMP, HTTP, HTTPS, FTP (client/server), SMTP, DHCP, DNS, NTP, RTP/RTCP, RTSP, SNMP (MIB-2)			
ONVIF conformance	Yes			
Wireless network	Yes (with optional)*3			
Number of clients	10			
Authentication	IEEE802.1X			
Analog Video Output				
Signal system	NTSC	PAL	NTSC	PAL
Horizontal resolution	530 TVL			
S/N ratio	More than 50 dB			
Interface				
Ethernet	10BASE-T/100BASE-TX (RJ-45)			
Serial interface	RS-232C, RS-422/RS-485 (PELCO D protocol)			
Card slots	CF card x1			
Analog video output	Composite video (1Vp-p)			
Sensor input	x 4			
Alarm output	x 2			
External microphone input	Mini-jack (Monaural), MIC IN/LINE IN: 2.2k ohm, 2.45VDC plug-in power			
Audio line output	Mini-jack (Monaural), Max output level: 1 Vrms			
General				
Mass	4.3 kg (9 lb 8 oz)			
Dimensions (ø x H)	238 x 344 mm (9 3/8 x 13 5/8 inches)			
Power requirements	AC 24 V			
Power consumption	78 W max.			
Operating temperature	-40 to 50 °C (-40 to 122 °F)			
Storage temperature	-20 to +60 °C (-4 to 140 °F)			
Rating	Ingress Protection: IP66 Impact Resistance: IK10			
System Requirements				
Operating system	Windows XP, Windows Vista			
Processor	CPU: Pentium4 3 GHz, Intel Core2 Duo 2 GHz or higher			
Memory	1 GB or more			
Web browser	Microsoft Internet Explorer Ver6.0 or Ver7.0			
Supplied Accessories	Top sunshade, Rotate-and-lock coupling, Waterproof covers, Bolts, Installation manual, CD-ROM (User's guide, SNC toolbox), Wire fixing belt, Cables			

*1 Removable IR Cut Filter *2 Available with software version 1.1 or later *3 With optional SNCA-CFW5

SYSTEM CONFIGURATIONS

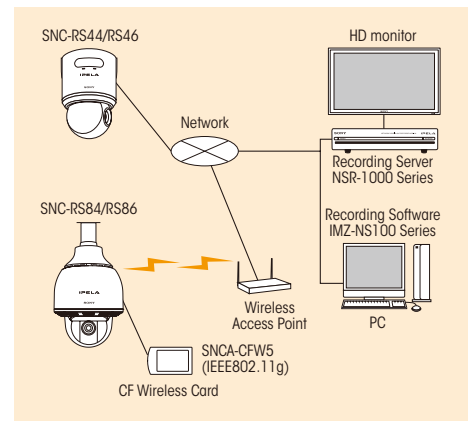


DIMENSIONS

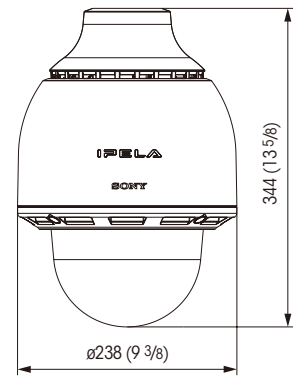

Unit: mm (inches)

CONNECTORS

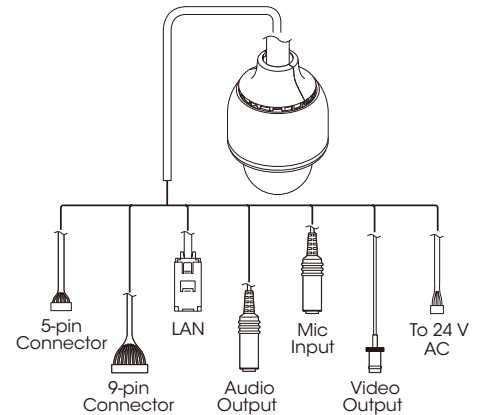

* SNC-RS84 and SNC-RS86 include software developed by the OpenSSL Project for use in the OpenSSL Toolkit. (<http://www.openssl.org/>)

Distributed by

© 2009 Sony Corporation. All rights reserved.
 Reproduction in whole or in part without written permission is prohibited.
 Features and specifications are as of version 1.1 or later and subject to change without notice.
 The values for weight and dimension are approximate.
 Sony is a registered trademark of Sony Corporation.
 IPELA is trademark of Sony Corporation.
 Windows, XP, and Vista are trademarks of Microsoft Corporation.
 Core is a trademark of Intel Corporation.
 All other trademarks are the property of their respective owners.