


# TECNOVIDEO

CCTV SYSTEMS AND ACCESSORIES

## SECPTZ150TV2 SERIES

DIE-CASTING ALUMINIUM PTZ CAMERA STATION

- DIE-CASTING ALUMINIUM CONSTRUCTION
- HIGH-SPEED ROTATION AND MONITORING
- EASY INSTALLATION AND MAINTENANCE
- WEATHERPROOF STANDARD IP66
- 3MP CAMERA, 30FPS, 33x OPTICAL ZOOM
- SUPPORTS 802.1X and SNMP (V1-3)
- ONVIF PROFILE G/S/T COMPLIANT



ONVIF | GST

### TECHNICAL SPECIFICATIONS

#### GENERAL & MECHANICAL

<b>Dimensions</b>	See drawings next page
<b>Operating Temperature</b>	-40° +65°C (+75°C peak)
<b>Construction</b>	Die-Casting Aluminum
<b>Finish</b>	Powder coating (White Ivory painted)
<b>Mounting</b>	See drawings next page
<b>Wiper</b>	Yes
<b>Pan Angle</b>	360° (continuous rotation)
<b>Pan Speed</b>	0 – 120°/s
<b>Tilt Angle</b>	-90° to +40°
<b>Tilt Speed</b>	0 – 40°/s
<b>Preset</b>	256
<b>Rotation angle</b>	Electronically adjustable
<b>Backlash</b>	<0,2°
<b>Max preset accuracy</b>	+/- 0,1°
<b>Preset Repeatability</b>	+/- 0,05°
<b>Control protocol</b>	Pelco D, 57600 Baudrate
<b>Weight</b>	Unit: 13.7Kg / Package:19.4kg

#### ELECTRICAL

<b>Thermostatically controlled heater</b>	<b>T[°C] ON</b> = 4 ± 4°C, <b>T[°C] OFF</b> = 15 ± 5°C
<b>Available voltage</b>	24VAC (+/-10%)
<b>Unit Max power consumption</b>	40W (Heater off), 100W (Heater on)
<b>IR LED Max power consumption</b>	24W (IR LED on)

#### VIDEO/CAMERA

<b>Sensor</b>	1/2.8" Progressive CMOS, 3MP
<b>Resolution</b>	Up to 2065x1553 @30fps
<b>Compression</b>	H.265/H.264/MJPEG
<b>Streaming</b>	Up to 4 configurable streams
<b>Frame Rate</b>	30 fps
<b>Sensitivity</b>	Color: 0.04 lux, B/W: 0.002 lux
<b>Shutter Speed</b>	1~1/10000 s
<b>Optical Filter</b>	Automatically removable IR-cut filter
<b>White Balance</b>	Contrast White Balance
<b>Dynamic range</b>	WDR/HDR
<b>Lens</b>	33x Optical Zoom Autofocus, 10x Digital Zoom, AF, P-Iris, Auto-Iris; 4.6-152mm; F1.6

#### Analytics

#### Image settings

Motion Detection/ Tampering/ Audio detection  
Color, Brightness, Sharpness, Contrast, White Balance,  
Exposure control, 2DNR/3DNR/NR by motion masking  
External Input, Analytics, Network Failure Detection,  
Periodical Event, Manual Trigger  
External Output Activation  
microSD (card not provided)  
support for recording to NAS

#### Event Triggers

#### Event Actions

#### Local storage

#### Network Storage

#### NETWORK

#### Interface

#### Security

#### ONVIF

#### Protocols

10/100 Mbps Ethernet  
User Authentication/ HTTPS/ IP Filter/ IEEE 802.1x  
ONVIF profile G/S/T compliant  
IPv4/v6, TCP, UDP, RTP, RTSP, HTTP, HTTPS, ICMP, FTP,  
SMTP, DHCP, PPPoE, UPnP, IGMP, SNMP, QoS, ARP, NTP

#### LED ILLUMINATOR

#### LED

#### Wavelength

#### Beam patterns

IR LED  
850nm  
25°

#### CERTIFICATIONS

#### Ingress Protection

#### EMC

EN 60529 (IP66)  
EN 55032 :2015 [Class A]  
EN 55035 :2017

#### MODELS

#### SECPTZ150TV2/24

PTZ camera station, 24VAC, without IR Illuminators

*All the above PTZ camera stations include sunshield, heater and integrated wiper, a built-in telemetry receiver, variable speed motors. IR illuminators to be purchased separately.*

#### ACCESSORIES

#### PSU150

230VAC power supply (add-on kit)

#### IR25150

2x 25° beam pattern IR illuminator (add-on kit)

#### ALBK150

Wall mounting bracket

#### WP1010F


10 Liters washer tank, 10meters pump, float switch, frame version, 24VAC

#### WP1010C


10 Liters washer tank, 10meters pump, float switch, cabinet version, 24VAC

**DIMENSIONS**


**FRONT VIEW (version with IR LED)**

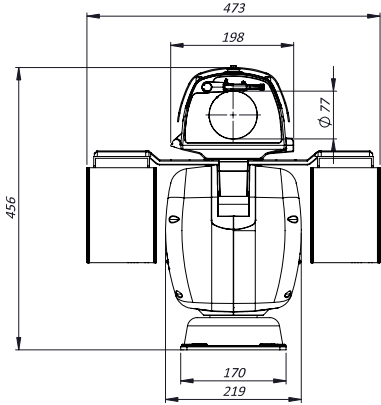


**SIDE VIEW (version with IR LED)**

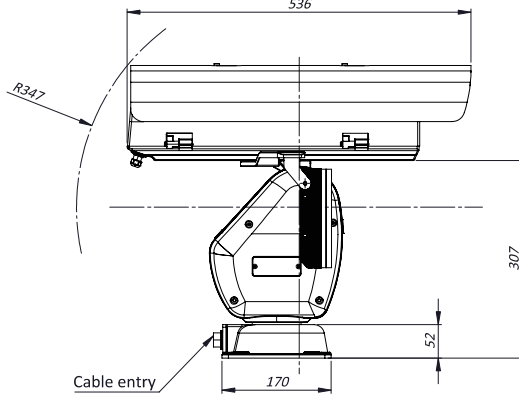


**MOUNTING PATTERN**

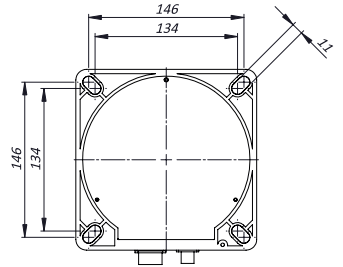


**FRONT VIEW (version without IR LED)**

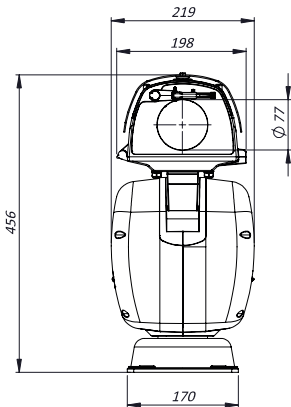


**SIDE VIEW (version without IR LED)**

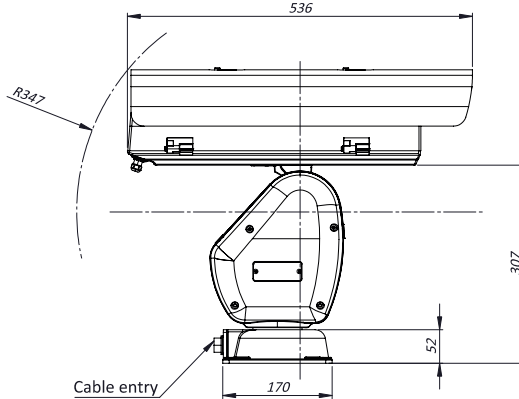


**MOUNTING PATTERN**

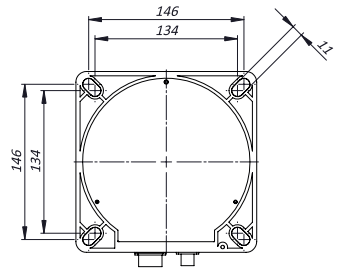


**FRONT VIEW (mounting bracket)**

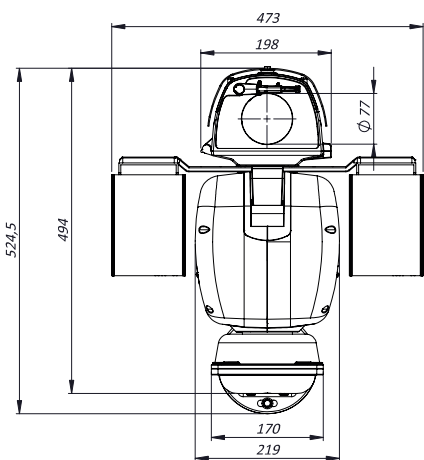

**SIDE VIEW (mounting bracket)**

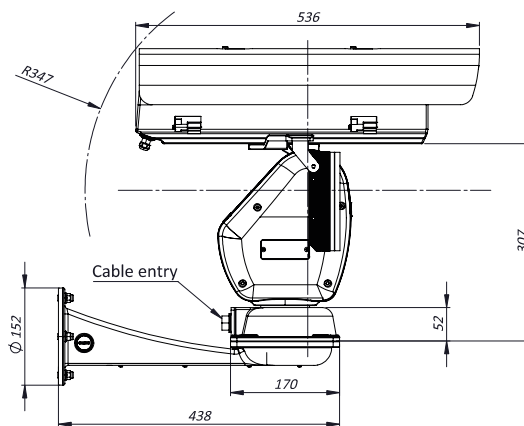

**MOUNTING BRACKET**

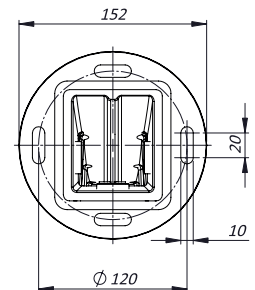

*The unit cannot be installed upside-down nor horizontally*